


PDT055

Punta elicoidale al diamante Z2 H4
Per pantografo - Assialità 54°

CNC Helical routerbit Z2 pcd H4 - axial 54°

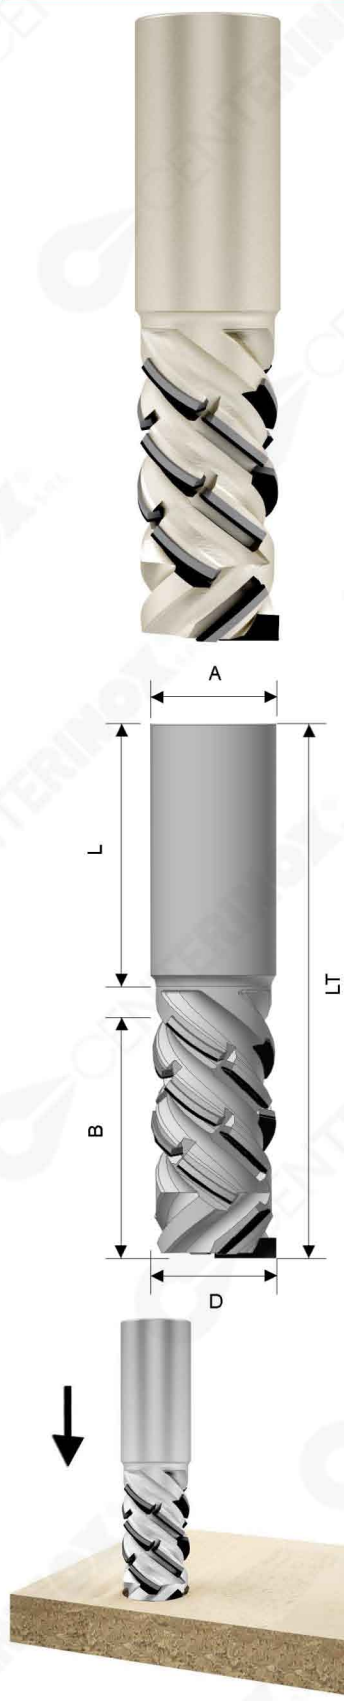

CODE		D mm	B mm	LT mm	A mm	L mm	Z=2 n° placch.
RIGHT Rot.	LEFT Rot.						
PDT055.001R	PDT055.001L	20	15	80	20	50	6 + 1 PCD
PDT055.002R	PDT055.002L	20	15	80	25	50	6 + 1 PCD
PDT055.003R	PDT055.003L	20	20	85	20	50	8 + 1 PCD
PDT055.004R	PDT055.004L	20	20	85	25	50	8 + 1 PCD
PDT055.005R	PDT055.005L	20	25	90	20	50	10 + 1 PCD
PDT055.006R	PDT055.006L	20	25	90	25	50	10 + 1 PCD
PDT055.007R	PDT055.007L	20	30	95	20	50	12 + 1 PCD
PDT055.008R	PDT055.008L	20	30	95	25	50	12 + 1 PCD
PDT055.009R	PDT055.009L	20	35	100	20	50	14 + 1 PCD
PDT055.010R	PDT055.010L	20	35	100	25	50	14 + 1 PCD
PDT055.011R	PDT055.011L	20	40	105	20	50	16 + 1 PCD
PDT055.012R	PDT055.012L	20	40	105	25	50	16 + 1 PCD
PDT055.013R	PDT055.013L	20	45	110	20	50	18 + 1 PCD
PDT055.014R	PDT055.014L	20	45	110	25	50	18 + 1 PCD
PDT055.015R	PDT055.015L	22	15	80	20	50	6 + 1 PCD
PDT055.016R	PDT055.016L	22	15	80	25	50	6 + 1 PCD
PDT055.017R	PDT055.017L	22	20	85	20	50	8 + 1 PCD
PDT055.018R	PDT055.018L	22	20	85	25	50	8 + 1 PCD
PDT055.019R	PDT055.019L	22	25	90	20	50	10 + 1 PCD
PDT055.020R	PDT055.020L	22	25	90	25	50	10 + 1 PCD
PDT055.021R	PDT055.021L	22	30	95	20	50	12 + 1 PCD
PDT055.022R	PDT055.022L	22	30	95	25	50	12 + 1 PCD
PDT055.023R	PDT055.023L	22	35	100	20	50	14 + 1 PCD
PDT055.024R	PDT055.024L	22	35	100	25	50	14 + 1 PCD
PDT055.025R	PDT055.025L	22	40	105	20	50	16 + 1 PCD
PDT055.026R	PDT055.026L	22	40	105	25	50	16 + 1 PCD
PDT055.027R	PDT055.027L	22	45	110	20	50	18 + 1 PCD
PDT055.028R	PDT055.028L	22	45	110	25	50	18 + 1 PCD
PDT055.029R	PDT055.029L	22	50	115	20	50	20 + 1 PCD
PDT055.030R	PDT055.030L	22	50	115	25	50	20 + 1 PCD
PDT055.031R	PDT055.031L	25	15	80	25	50	6 + 1 PCD
PDT055.032R	PDT055.032L	25	20	85	25	50	8 + 1 PCD
PDT055.033R	PDT055.033L	25	25	90	25	50	10 + 1 PCD
PDT055.034R	PDT055.034L	25	30	95	25	50	12 + 1 PCD
PDT055.035R	PDT055.035L	25	35	100	25	50	14 + 1 PCD
PDT055.036R	PDT055.036L	25	40	105	25	50	16 + 1 PCD
PDT055.037R	PDT055.037L	25	45	110	25	50	18 + 1 PCD
PDT055.038R	PDT055.038L	25	50	115	25	50	20 + 1 PCD
PDT055.039R	PDT055.039L	25	55	120	25	50	22 + 1 PCD
PDT055.040R	PDT055.040L	25	60	125	25	50	24 + 1 PCD
PDT055.041R	PDT055.041L	25	65	130	25	50	26 + 1 PCD

Ottima finitura senza scheggiature sul pannello con le nuove frese ad assialità 54°.
Massime prestazioni: maggiore durata dell' utensile, abbattimento rumore, minore sforzo di taglio, minore rigonfiamento del pannello al suo interno, fresa utilizzabile su qualsiasi tipologia di pannello, legno e derivati.
Ottima finitura su materiali con: massello a fibra lunga, laminati soggetti a scheggiature, pellicole di rivestimento, rivestimenti melaminici o carte molto sottili.

*Axial cutting edge extreme for excellent finish panel :
Longer tool life, noise abatement, less cutting effort, cutter used on any type of panel, wood and derivatives.
Excellent finishing cut on materials with: melamine, paper very thin, laminate material subject to chipping, film coating, solid wood long-fiber.*