


TFM12A

Testa per smussi a 45°

45° bevels cutterhead




Utensile collaudato
secondo la normativa
Tool tested
according to the norm

EN 847-1

CODICE CODE	D mm	d* mm	V	RIF
TFM12A.001	120	35 (50)	2	B
TFM12A.002	120	35 (50)	2	A
TFM12A.003	150	35 (50)	2	B
TFM12A.004	150	35 (50)	2	A
TFM12A.005	200	35 (50)	2	B
TFM12A.006	200	35 (50)	2	A
TFM12A.007	250	35 (50)	2	B
TFM12A.008	250	35 (50)	2	A
TFM12A.009	120	35 (50)	3	B
TFM12A.010	120	35 (50)	3	A
TFM12A.011	150	35 (50)	3	B
TFM12A.012	150	35 (50)	3	A
TFM12A.013	200	35 (50)	3	B
TFM12A.014	200	35 (50)	3	A
TFM12A.015	250	35 (50)	3	B
TFM12A.016	250	35 (50)	3	A
TFM12A.017	120	35 (50)	4	B
TFM12A.018	120	35 (50)	4	A
TFM12A.019	150	35 (50)	4	B
TFM12A.020	150	35 (50)	4	A
TFM12A.021	200	35 (50)	4	B
TFM12A.022	200	35 (50)	4	A
TFM12A.023	250	35 (50)	4	B
TFM12A.024	250	35 (50)	4	A

* La quota tra parentesi è la massima allargatura foro possibile

* The maximum inner hole size it is shown between the brackets

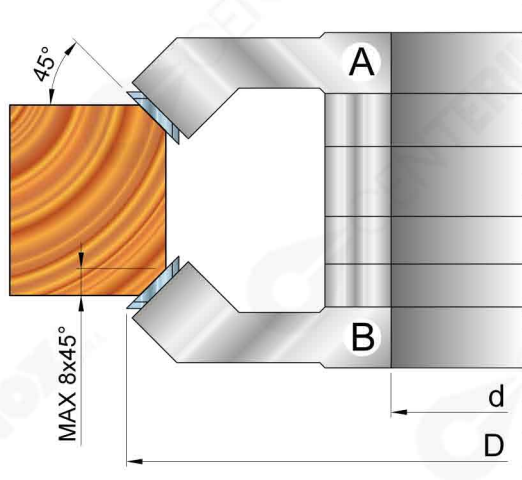

CODICE CODE	PARTI DI RICAMBIO SPARE PARTS		
VRS6	VITE / SCREW	M5X7	
RSN2	RASANTE / SPUR	14X14X2	